
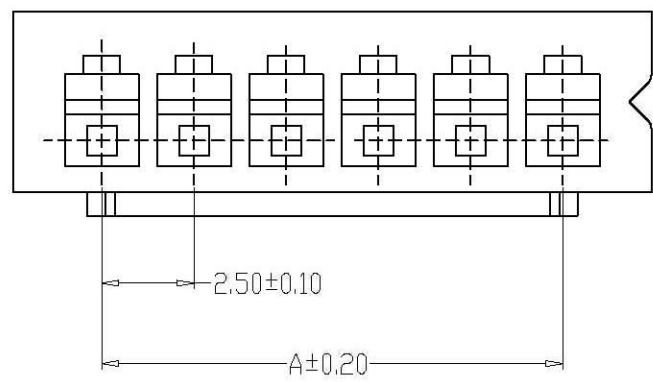
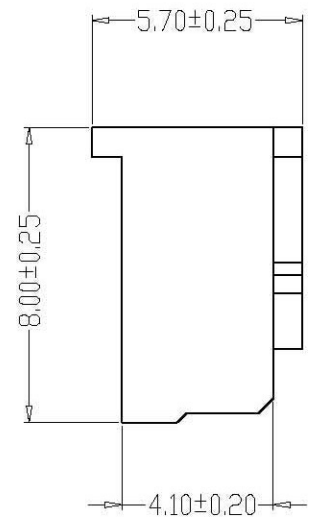


0E Foxit PDF Editor ±ã¼-  
 °æE"Eu0D (c) by Foxit Software Company, 2004  
 ½00ÄOU/EA'AjE

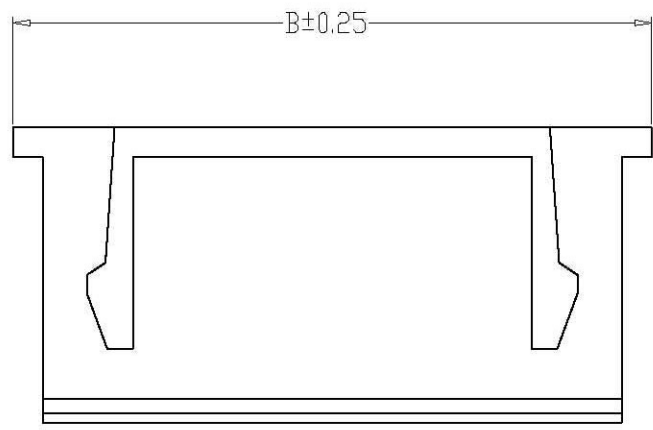

**SPECIFICATIONS**

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C ~ +85°C
- 4、Contact Resistance: 10mΩ Max
- 5、Insulation Resistance: 1000mΩ Min
- 6、Withstanding Voltang: 1000 AC/minute
- 7、Material:Housing:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
A2501H-02P	2.50	7.30
A2501H-03P	5.00	9.80
A2501H-04P	7.50	12.30
A2501H-05P	10.00	14.80
A2501H-06P	12.50	17.30
A2501H-07P	15.00	19.80
A2501H-08P	17.50	22.30
A2501H-09P	20.00	24.80
A2501H-10P	22.50	27.30
A2501H-11P	25.00	29.80
A2501H-12P	27.50	32.30
A2501H-15P	35.00	39.80

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图	郑 弋			料号 PART NO.	A2501H-NP		版本 REV.	A
			X.±0.25	X.*±2'	审核	2008、07、01			品名 TITLE	XH孔座		页次 SHEET	1/1
			.X±0.20	.X*±1'	核准	2008、07、03			客户料号 CUTL. NO.				
			.XX±0.15	.XX*±0.5'		2008、07、05			杨 斌 深圳市宏利电子有限公司				
			.XXX±0.10	.XXX*±0.5'	单位 UNITS	MM	比例 SCALE	1:1					